

spirax sarco®


Cast Iron Inverted Bucket Steam Trap Series 200

The trap contains an inverted bucket mechanism which responds to the difference in density between steam and condensate. The discharge action is cyclic. Condensate and non-condensibles are discharged close to steam temperature

Model ↔	211	212	213	215	216
PMO	250 psig (see below)				
Sizes	1/2"	3/4"	1"	1-1/2"	2"
Connections	NPT				
Construction	Cast Iron Body, Stainless Steel Internals				

Construction Materials

No.	Part	Material	
1	Cover	Cast Iron	DIN 1691 GG 20
2	Cover Bolts UNC	Steel	BS 3692 Gr.8.8
	Cover Nuts	Steel	BS 3692 Gr.8
4	Body	Cast Iron	DIN 1691 GG 20
5	Bucket	Stainless Steel	A 240 Type 321
6	Valve Guide Plate		
	Screws	Stainless Steel	B 18.6.3
7	Valve Guide Plate	Stainless Steel	A 240 Type 321
8	Cover Gasket	Nickel Reinforced Exfoliated Graphite	
9	Valve Seat	Stainless Steel	AISI 440 B
10	Valve	Stainless Steel	AISI 440 B
11	Valve Lever	Stainless Steel	A 240 Type 321
12	Internal Tube	Steel	A 105 Gr. A

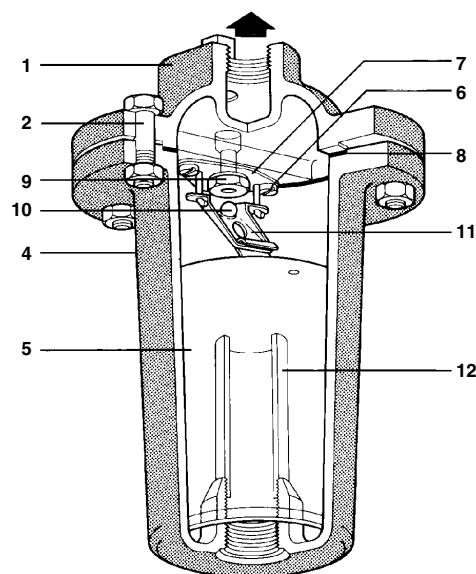

Typical Applications

Steam main drip stations, laundry equipment, industrial dryers and storage tanks.

Capacities: See TIS 2.405

Limiting Operating Conditions

Max. Operating Pressure (PMO) Max. Operating Temperature *

Model #	psig	barg
211/6	250	17
211/7	200	13.8
1/2" 211/8	120	8.5
211/10	60	4
211/12	30	2
212/7	250	17
212/8	200	13.8
3/4" 212/10	120	8.5
212/12	60	4
212/16	30	2
213/12	250	17
213/14	180	12.5
1" 213/16	120	8.5
213/20	60	4
213/24	30	2
215/18	250	17
215/20	180	12.5
1-1/2" 215/22	120	8.5
215/28	60	4
215/36	30	2
216/24	250	17
2" 216/32	120	8.5
216/40	60	4
216/48	36	2.5


410°F (210°C) at all operating pressures

* For superheated steam applications, a check valve should be installed at the trap inlet.

Pressure Shell Design Conditions

PMA Max. allowable pressure 319 psig/up to 410°F
22 barg/0-210°C

TMA Max. allowable temperature 410°F/up to 319 psig
210°C/0-22 barg



Dimensions (nominal) in inches and millimeters

Size	A	B	C	D	Weight
1/2"	6.4 163	4.3 108	7.0 178	2.6 67	6.25 lb 2.8 kg
3/4"	7.9 200	5.3 135	9.0 229	3.7 93	11.5 lb 5.2 kg
1"	10.6 269	7.4 188	11.0 280	4.5 114	27.0 lb 12.2 kg
1-1/2"	14.4 365	9.4 238	15.0 380	5.5 140	59.0 lb 27.0 kg
2"	17.0 450	11.3 286	18.5 457	7.2 165	96.0 lb 49.4 kg

Local regulation may restrict the use of this product below the conditions quoted. Limiting conditions refer to standard connections only. In the interests of development and improvement of the product, we reserve the right to change the specification.

TIS 2.401 US 09.00

Cast Iron Inverted Bucket Steam Trap Series 200

Sample Specification


Steam traps shall be of the mechanical inverted bucket type with cast iron bodies with screwed NPT vertical connections and stainless steel internals.

Installation

A pipeline strainer should be installed ahead of any trap to protect the head and seat from dirt and scale. Suitable full-port isolation valves should be placed around trap to permit servicing. The trap should be installed below the equipment drainage connection in a vertical position with the inlet at the bottom so that the bucket will rise and fall vertically.

Maintenance

This product must be removed from the line for maintenance. Complete isolation of the trap from both supply and return line is required before any servicing is performed. The trap should be disassembled periodically for inspection and cleaning of the valve head and seat, and operating mechanism. The bucket vent hole must be clear. Worn or damaged parts should be replaced using a complete valve and seat assembly. **Complete installation and maintenance instructions are given in IMI 2.400, which accompanies the product.**

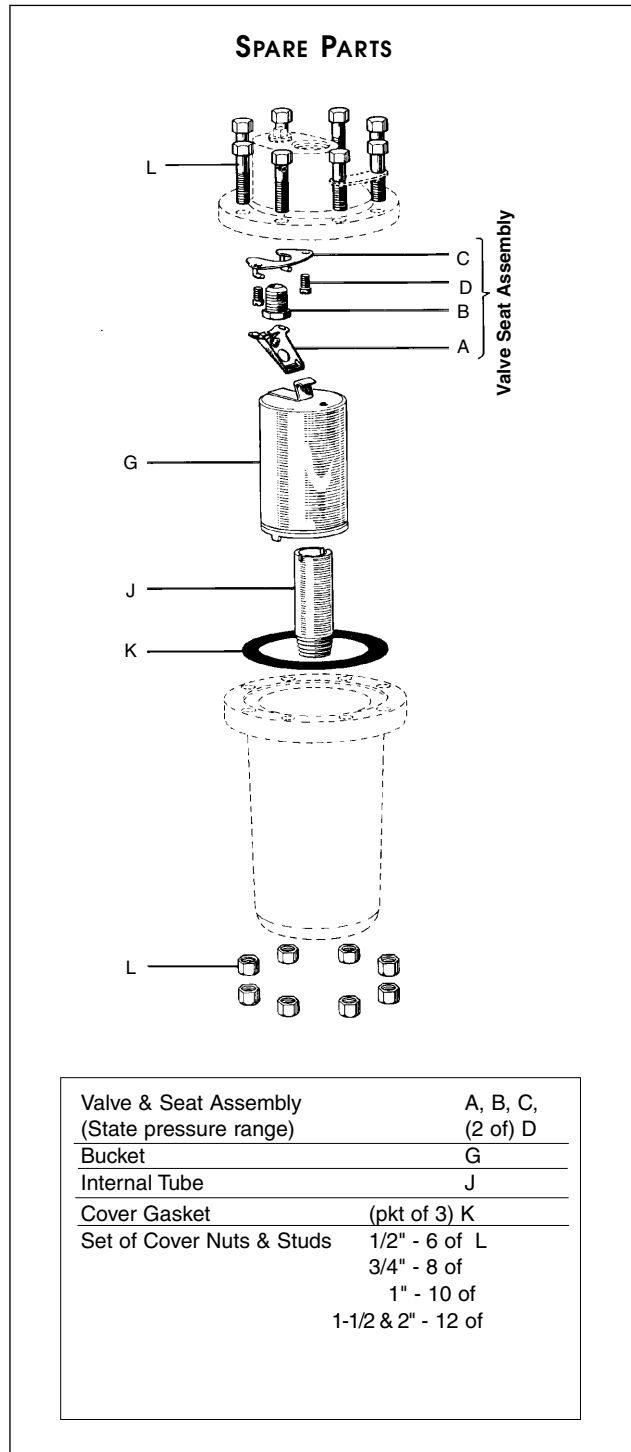

© Spirax Sarco, Inc. 2000

TIS 2.401 US 09.00