



Cert. No. LRQ 0963008

ISO 9001

spirax sarco

TI-P401-07
AB Issue 5

IT Immersion Tubes

Description

Spirax Sarco immersion tubes may be:

- Connected directly to the pipeline, to distribute condensate into feedtanks.
- Used with a mixing unit to form a flash condensing de-aerator head (not applicable to the IT100 unit).

Note: A flash condensing de-aerator head can be used to mix flash steam (from a TDS control system), cold make-up water, and condensate, and sparge it into a feedtank. It is described in separate literature.

Immersion tubes offer a much neater solution than traditional sparge pipes, and can reduce many of the problems associated with them, for example vibration, rusting, and waterhammer.

Immersion tubes are suitable for both new and retrofit applications where the feedtank is adequately constructed and braced.

Available types

Available as types IT100_, IT150_, IT200_, IT250_, IT300_, and IT400_ with an integral inside bolt circle sandwich flange to suit ANSI 150 or EN 1092 PN16. They are available in lengths to suit TM metric feedtanks. Other lengths can be made to special order. Immersion tubes are designated by IT followed by DN followed by length of immersion tube in mm. e.g. IT250-1600 is DN250 and is 1 600 mm long from the underside of the flange. It is suitable for a 2 000 mm deep tank.

Capacity - when used without a Mixing Unit (MU)

IT type	DN	*Gravity condensate (with 5% Flash) kg/h	Pumped condensate kg/h
IT100_	100	1 015	2 500
IT150_	150	2 285	5 000
IT200_	200	4 065	10 000
IT250_	250	6 350	20 000
IT300_	300	9 145	30 000
IT400_	400	16 255	50 000

* For other quantities of flash steam the capacity may be determined pro rata i.e. for 10% flash capacity is half that shown.

As a general rule the size of an immersion tube should be at least one DN larger than the condensate return main.

Important note:

The above table is only valid for condensate, where the flash steam content has to be considered.


When sizing an immersion tube for use with a de-aerator head, use the guidelines in the flash condensing de-aerator head TI. The DH/IT has a higher overall capacity as it is able to condense the flash steam content of the fluid before it enters the tank. We do not make a mixing unit to suit the IT100.

Limiting conditions

PN2.5 rating. Suitable for condensate at up to 1 bar g, 120°C.

Materials

No.	Part	Material
1	Immersion tube	Austenitic stainless steel
2	Gaskets	Silicone rubber (colour may vary)

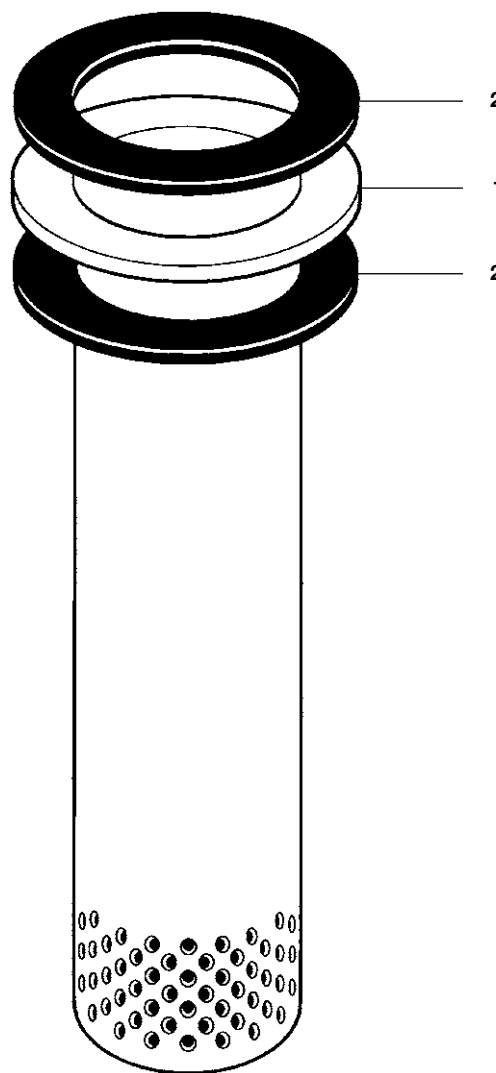

Dimensions/weights (approximate) in mm and kg

Model	A	B PN16	B ANSI 150	C	Weight
IT100 - 950	100	162	157	950	7
IT100 - 1200	100	162	157	1 200	9
IT100 - 1600	100	162	157	1 600	11
IT150 - 950	150	212	216	950	10
IT150 - 1200	150	212	216	1 200	12
IT150 - 1600	150	212	216	1 600	16
IT200 - 950	200	268	270	950	13
IT200 - 1200	200	268	270	1 200	16
IT200 - 1600	200	268	270	1 600	21
IT200 - 2100	200	268	270	2 100	28
IT250 - 1200	250	320	324	1 200	20
IT250 - 1600	250	320	324	1 600	27
IT250 - 2100	250	320	324	2 100	35
IT300 - 1200	300	378	381	1 200	24
IT300 - 1600	300	378	381	1 600	32
IT300 - 2100	300	378	381	2 100	42
IT400 - 1200	375	490	470	1 200	29
IT400 - 1600	375	490	470	1 600	39
IT400 - 2100	375	490	470	2 100	51

Installation

We recommend the immersion tube is positioned in the middle of the top of the tank.

The immersion tube can be fitted to a boiler feedtank by the following methods:

1. Using an existing flange.
The immersion tube is designed so that it can pass through an aperture with dimensions according to BS 1600 Schedule 40. The sandwich flange of the immersion tube is equal to the raised face diameter of the flange for which it is suitable. Gaskets are to be placed above and below the sandwich flange.
2. On new installations a specific connection should be incorporated, as described in separate literature.
It is essential that a vacuum breaker is fitted to the condensate return main near to the immersion tube. Consider the use of a Spirax Sarco VB14 vacuum breaker.

How to order example:

1. Immersion tube IT150-950 in austenitic stainless steel to suit DN150, PN16 flanges complete with:
2. Silicone rubber gaskets to suit DN150, PN16.

